



# MPL

## Metallized polypropylene film capacitor

### MKP - Low Dissipation - Precision



#### Main applications

Filtering, timing, integrating circuits, high performance and high precision circuits. Low pulse operation

#### Dielectric

Polypropylene

#### Electrodes

Vacuum deposited metal layers

#### Coating

UL 510 / CSA TIL I-26 polyester tape wrapping; UL 94 V-0 resin end fill (flame retardant execution)

#### Construction

Extended metallized film (refer to general technical information)

#### Terminals

Tinned copper wire (Lead free)

#### Reference standard

IEC 60384/16, IEC 60068, RoHS compliant

#### Climatic category

55/85/56 (IEC 60068/1), FME (DIN40040)

#### Operating temperature range

-55°...+85°C

#### Rated capacitance (Cr)

1000pF to 4,7μF, in compliance with IEC60063. Refer to article table

#### Capacitance code

The four digits indicating the capacitance code are used as follows:

1st digit = number of zero to be added to the three significant figures of the capacitance value expressed in pF

2nd, 3rd and 4th digit = the three significant figures of the capacitance value

Examples: 2740 pF = 1274; 0.56 μF = 560000 pF = 3560; 1.21 μF = 1210000 pF = 4121

#### Capacitance tolerance (at 1kHz)

±1% (code=F), ±1,25% (code=A), ±2% (code=G), ±2,5% (code=H); ±3% (code=I)

#### Capacitance temperature coefficient

Refer to graphs in general technical information

#### Long term stability (at 1 kHz)

Capacitance variation ≤ ±0,5% after a period of 2 years at standard environmental conditions

#### Rated voltage (Ur)

160, 250, 400, 630 Vdc  
(Permissible AC voltage at 60Hz: 90, 200, 220, 250 Vac)

#### Category voltage (Uc)

Uc=Ur at +85°C

#### Self inductance

≤ 1nH/mm of capacitor and leads length used for connection

#### Maximum pulse rise time

Refer to article table. The pulse characteristic Ko depends on the voltage waveform. In any case the value given in the article table must not be exceeded

#### Dissipation factor (DF), max.

$tg\delta \times 10^{-4}$ , measured at 25±5°C

| Freq.  | Cr≤0.1μF | 0.1μF<Cr≤1μF | Cr>1μF |
|--------|----------|--------------|--------|
| 1kHz   | 6        | 6            | 6      |
| 10kHz  | 10       | 20           | -      |
| 100kHz | 30       | -            | -      |

#### Insulation resistance (IR)

Measured between terminals, at 25±5°C, after 1 minute of electrification at 100Vdc

| Cr       | IR       |
|----------|----------|
| ≤ 0,33μF | ≥ 100GΩ  |
| > 0,33μF | ≥ 30000s |

#### Test voltage between terminals (Ut)

1,6xUr (DC) applied for 2s at 25±5°C (1 minute for type test)

#### Damp heat test (steady state)

Test conditions:

Temperature= +40±2°C

Relative humidity=93±2%

Test duration= 56 days

Performance:

Capacitance change ≤ ±1%

DF change ≤ 0.0010 at 10kHz for Cr ≤ 1μF

DF change ≤ 0.0010 at 1kHz for Cr > 1μF

IR ≥ 50% of initial limit value

#### Endurance test

Test conditions:

Temperature= +85±2°C

Test duration= 2000h

Voltage applied=1,25xUr(DC)

Performance:

Capacitance change ≤ ±1%

DF change ≤ 0.0010 at 10kHz for Cr ≤ 1μF

DF change ≤ 0.0010 at 1kHz for Cr > 1μF

IR ≥ 50% of initial limit value

#### Resistance to soldering heat test

Test conditions:

Solder bath temperature= +260±5°C

Dipping time (with heat screen)= 10±1s

Performance:

Capacitance change ≤ ±0,25%

DF change ≤ 0.0010 at 10kHz for Cr ≤ 1μF

DF change ≤ 0.0010 at 1kHz for Cr > 1μF

IR ≥ 50% of initial limit value

#### Reliability (MIL HDB 217)

Application conditions:

Applied voltage= 0,5 x Ur(DC)

Temperature= +40±2°C

Failure rate:

(1FIT=1×10<sup>-9</sup> failures/components x hours)

≤ 3FIT for all the values

Failure criteria (DIN44122):


Capacitance change > ±10%

DF change > 2 x initial value

IR < 0,005 x initial limit value

Short or open circuit


**Warning: this specification must be completed with the data given in the "General technical information" chapter**



# MPL

## Metallized polypropylene film capacitor

### MKP - Low Dissipation - Precision

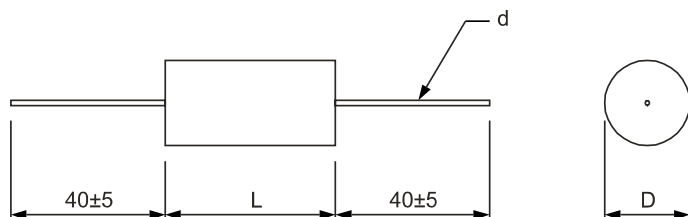

**Dimensional tolerances (mm)**

| L    | L±  | D±  |
|------|-----|-----|
| 10,5 | 1,0 | 1,0 |
| 13,0 | 1,5 | 1,0 |
| 19,0 | 1,5 | 1,5 |
| 27,0 | 2,0 | 2,0 |
| 32,0 | 2,0 | 2,0 |


**MPL article table (different values available upon request)**

| Rated voltage |                    | Cap. value (µF) |        | Dimension in mm |      |                   | du/dt | Ko                 | ICEL ordering code <sup>(1)</sup> |
|---------------|--------------------|-----------------|--------|-----------------|------|-------------------|-------|--------------------|-----------------------------------|
| Vdc           | Vac                | from            | to     | D               | L    | d                 | V/µs  | V <sup>2</sup> /µs |                                   |
| 160           | 90                 | 0,0182          | 0,047  | 4,5             | 10,5 | 0,6               | 56    | 17920              | MPL116####*A                      |
| 160           | 90                 | 0,0475          | 0,056  | 5               | 10,5 | 0,6               | 56    | 17920              | MPL116####*A                      |
| 160           | 90                 | 0,0562          | 0,068  | 5               | 13   | 0,6               | 44    | 14080              | MPL116####*B                      |
| 160           | 90                 | 0,0681          | 0,1    | 5,5             | 13   | 0,6               | 44    | 14080              | MPL116####*B                      |
| 160           | 90                 | 0,102           | 0,12   | 6               | 13   | 0,6               | 44    | 14080              | MPL116####*B                      |
| 160           | 90                 | 0,121           | 0,18   | 6,5             | 13   | 0,6               | 44    | 14080              | MPL116####*B                      |
| 160           | 90                 | 0,182           | 0,22   | 7               | 13   | 0,6               | 44    | 14080              | MPL116####*B                      |
| 160           | 90                 | 0,221           | 0,33   | 7               | 19   | 0,6               | 25    | 8000               | MPL116####*D                      |
| 160           | 90                 | 0,332           | 0,39   | 7,5             | 19   | 0,8               | 25    | 8000               | MPL116####*D                      |
| 160           | 90                 | 0,392           | 0,47   | 8               | 19   | 0,8               | 25    | 8000               | MPL116####*D                      |
| 160           | 90                 | 0,475           | 0,56   | 9               | 19   | 0,8               | 25    | 8000               | MPL116####*D                      |
| 160           | 90                 | 0,562           | 0,68   | 8               | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 0,681           | 0,82   | 8,5             | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 0,825           | 1      | 9               | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 1,02            | 1,2    | 10              | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 1,21            | 1,5    | 11              | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 1,54            | 1,8    | 12,5            | 27   | 0,8               | 17    | 5440               | MPL116####*G                      |
| 160           | 90                 | 1,82            | 2,2    | 11,5            | 32   | 0,8               | 12,5  | 4400               | MPL116####*J                      |
| 160           | 90                 | 2,21            | 2,7    | 12,5            | 32   | 0,8               | 12,5  | 4400               | MPL116####*J                      |
| 160           | 90                 | 2,74            | 3,3    | 14              | 32   | 0,8               | 12,5  | 4400               | MPL116####*J                      |
| 160           | 90                 | 3,32            | 3,9    | 15              | 32   | 0,8               | 12,5  | 4400               | MPL116####*J                      |
| 160           | 90                 | 3,92            | 4,7    | 16              | 32   | 0,8               | 12,5  | 4400               | MPL116####*J                      |
| 250           | 200                | 0,00825         | 0,018  | 4,5             | 10,5 | 0,6               | 75    | 37500              | MPL125####*A                      |
| 250           | 200                | 0,0182          | 0,027  | 5               | 13   | 0,6               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,0274          | 0,047  | 5,5             | 13   | 0,6               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,0475          | 0,056  | 6               | 13   | 0,6               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,0562          | 0,068  | 6,5             | 13   | 0,6               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,0681          | 0,082  | 7               | 13   | 0,6               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,0825          | 0,12   | 7,5             | 13   | 0,8               | 55    | 27500              | MPL125####*B                      |
| 250           | 200                | 0,121           | 0,15   | 7               | 19   | 0,8               | 31    | 15500              | MPL125####*D                      |
| 250           | 200                | 0,154           | 0,18   | 7,5             | 19   | 0,8               | 31    | 15500              | MPL125####*D                      |
| 250           | 200                | 0,182           | 0,27   | 8               | 19   | 0,8               | 31    | 15500              | MPL125####*D                      |
| 250           | 200                | 0,274           | 0,33   | 8               | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,332           | 0,39   | 8,5             | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,392           | 0,47   | 9               | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,475           | 0,56   | 9,5             | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,562           | 0,68   | 10,5            | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,681           | 0,82   | 11,5            | 27   | 0,8               | 22    | 11000              | MPL125####*G                      |
| 250           | 200                | 0,825           | 1      | 11              | 32   | 0,8               | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 1,02            | 1,2    | 12,5            | 32   | 0,8               | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 1,21            | 1,5    | 14              | 32   | 0,8               | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 1,54            | 1,8    | 15,5            | 32   | 0,8               | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 1,82            | 2,2    | 16,5            | 32   | 0,8 <sup>^^</sup> | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 2,21            | 2,7    | 18,5            | 32   | 1                 | 15    | 7500               | MPL125####*J                      |
| 250           | 200                | 2,74            | 3,3    | 20              | 32   | 1                 | 15    | 7500               | MPL125####*J                      |
| 400           | 220 <sup>(2)</sup> | 0,00475         | 0,0082 | 4,5             | 10,5 | 0,6               | 150   | 120E03             | MPL140####*A                      |
| 400           | 220 <sup>(2)</sup> | 0,00825         | 0,012  | 5               | 13   | 0,6               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0121          | 0,018  | 5,5             | 13   | 0,6               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0182          | 0,027  | 6               | 13   | 0,6               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0274          | 0,033  | 6,5             | 13   | 0,6               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0332          | 0,039  | 7               | 13   | 0,6               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0392          | 0,056  | 7,5             | 13   | 0,8               | 110   | 88000              | MPL140####*B                      |
| 400           | 220 <sup>(2)</sup> | 0,0562          | 0,082  | 7               | 19   | 0,8               | 61    | 48800              | MPL140####*D                      |
| 400           | 220 <sup>(2)</sup> | 0,0825          | 0,12   | 7,5             | 19   | 0,8               | 61    | 48800              | MPL140####*D                      |

<sup>(1)</sup>Change the \* symbol with the needed capacitance tolerance code: F=±1%, A=±1,25%, G=±2%, H=±2,5%, I=±3%

Change the #### characters with the correspondent capacitance code - <sup>(2)</sup>Not suitable for across the line application.

<sup>^^</sup>: 2.2uF 250Vdc and 1.5uF 400Vdc terminals d=1mm



**MPL**  
**Metallized polypropylene film capacitor**  
**MKP - Low Dissipation - Precision**



| Rated voltage |                    | Cap. value (µF) |        | Dimension in mm |      |                   | du/dt | Ko                 | ICEL ordering code <sup>(1)</sup> |
|---------------|--------------------|-----------------|--------|-----------------|------|-------------------|-------|--------------------|-----------------------------------|
| Vdc           | Vac                | from            | to     | D               | L    | d                 | V/µs  | V <sup>2</sup> /µs |                                   |
| 400           | 220 <sup>(2)</sup> | 0,121           | 0,15   | 8,5             | 19   | 0,8               | 61    | 48800              | MPL140####*D                      |
| 400           | 220 <sup>(2)</sup> | 0,154           | 0,18   | 8               | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,182           | 0,22   | 8,5             | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,221           | 0,27   | 9,5             | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,274           | 0,33   | 10,5            | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,332           | 0,39   | 11              | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,392           | 0,47   | 12              | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,475           | 0,56   | 12,5            | 27   | 0,8               | 37,5  | 30000              | MPL140####*G                      |
| 400           | 220 <sup>(2)</sup> | 0,562           | 0,68   | 13              | 32   | 0,8               | 29    | 23200              | MPL140####*J                      |
| 400           | 220 <sup>(2)</sup> | 0,681           | 0,82   | 14,5            | 32   | 0,8               | 29    | 23200              | MPL140####*J                      |
| 400           | 220 <sup>(2)</sup> | 0,825           | 1      | 15,5            | 32   | 0,8               | 29    | 23200              | MPL140####*J                      |
| 400           | 220 <sup>(2)</sup> | 1,02            | 1,2    | 16,5            | 32   | 0,8               | 29    | 23200              | MPL140####*J                      |
| 400           | 220 <sup>(2)</sup> | 1,21            | 1,5    | 18              | 32   | 0,8 <sup>^^</sup> | 29    | 23200              | MPL140####*J                      |
| <hr/>         |                    |                 |        |                 |      |                   |       |                    |                                   |
| 630           | 250 <sup>(2)</sup> | 0,001           | 0,0047 | 4,5             | 10,5 | 0,6               | 200   | 252E03             | MPL163####*A                      |
| 630           | 250 <sup>(2)</sup> | 0,00475         | 0,0082 | 5               | 13   | 0,6               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,00825         | 0,01   | 5,5             | 13   | 0,6               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,0102          | 0,012  | 6               | 13   | 0,6               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,0121          | 0,015  | 6,5             | 13   | 0,6               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,0154          | 0,018  | 7               | 13   | 0,6               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,0182          | 0,027  | 7,5             | 13   | 0,8               | 190   | 239E03             | MPL163####*B                      |
| 630           | 250 <sup>(2)</sup> | 0,0274          | 0,039  | 6,5             | 19   | 0,6               | 100   | 126E03             | MPL163####*D                      |
| 630           | 250 <sup>(2)</sup> | 0,0392          | 0,056  | 7,5             | 19   | 0,8               | 100   | 126E03             | MPL163####*D                      |
| 630           | 250 <sup>(2)</sup> | 0,0562          | 0,082  | 8,5             | 19   | 0,8               | 100   | 126E03             | MPL163####*D                      |
| 630           | 250 <sup>(2)</sup> | 0,0825          | 0,1    | 8               | 27   | 0,8               | 58    | 73080              | MPL163####*G                      |
| 630           | 250 <sup>(2)</sup> | 0,102           | 0,12   | 9               | 27   | 0,8               | 58    | 73080              | MPL163####*G                      |
| 630           | 250 <sup>(2)</sup> | 0,121           | 0,15   | 9,5             | 27   | 0,8               | 58    | 73080              | MPL163####*G                      |
| 630           | 250 <sup>(2)</sup> | 0,154           | 0,18   | 10              | 27   | 0,8               | 58    | 73080              | MPL163####*G                      |
| 630           | 250 <sup>(2)</sup> | 0,182           | 0,22   | 10              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,221           | 0,27   | 11              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,274           | 0,33   | 12              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,332           | 0,39   | 13              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,392           | 0,47   | 13,5            | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,475           | 0,56   | 15              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,562           | 0,68   | 16              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,681           | 0,82   | 18              | 32   | 0,8               | 46    | 57960              | MPL163####*J                      |
| 630           | 250 <sup>(2)</sup> | 0,825           | 1      | 19              | 32   | 1                 | 46    | 57960              | MPL163####*J                      |

<sup>(1)</sup>Change the \* symbol with the needed capacitance tolerance code: F=±1%, A=±1,25%, G=±2%, H=±2,5%, I=±3%

Change the #### characters with the correspondent capacitance code - <sup>(2)</sup>Not suitable for across the line application.

^^: 2.2uF 250Vdc and 1.5uF 400Vdc terminals d=1mm

**Permissible AC voltage versus frequency (sinusoidal waveform) for ΔT=+10°C**  
**Referred to the largest length execution among available ones**

