


HS-324R-04-0300



Product image serves as example only.

Block Diagram

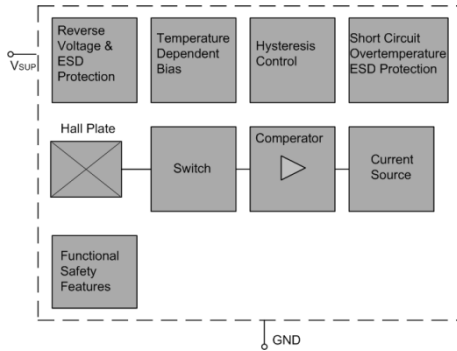

HS-324R-04-0300

Latching 2 - Wire  
Flatpack Hall Effect Sensor

Features

- › Compact size
- › Various switching sensitivities
- › Various switching points available
- › Customized types available

Approvals




Absolute Maximum Ratings

Symbol	Parameter	wire colour	Min.	Max.	Unit	Conditions
V <sub>SUP</sub>	Supply voltage	red	- 18		V	t < 1000 h <sup>1)</sup>
			-	28	V	t < 96 h <sup>1)</sup>
			-	32	V	t < 5 min <sup>1)</sup>
			-	40	V	t < 5 x 400 ms <sup>1)</sup> with series resistor R <sub>v</sub> > 100 Ohm
V <sub>OUT</sub>	Output voltage	red	- 0.5		V	t < 1000 h <sup>1)</sup>
			-	28	V	t < 96 h <sup>1)</sup>
			-	32	V	t < 5 min <sup>1)</sup>
			-	40	V	t < 5 x 400 ms <sup>1)</sup> with series resistor R <sub>v</sub> > 100 Ohm
I <sub>O</sub>	Output current	red	-	65	mA	
I <sub>OR</sub>	Reverse output current	red	- 50		mA	

<sup>1)</sup> No cumulative stress All voltages listed are referenced to ground (GND)

Dimensions

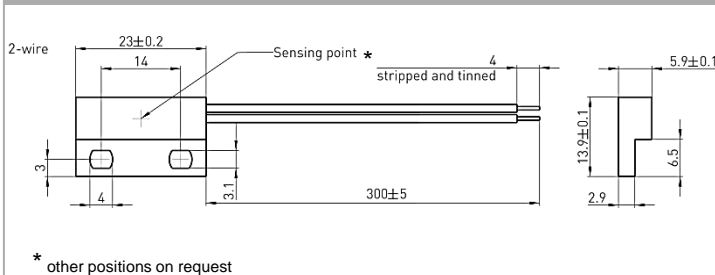

\* other positions on request

Wire Assignment

Name	Function	Cable colour
VSUP	Supply voltage	red
GND	Ground	black

HS-324R-04-0300  
└─ wire length [mm]


Material Information

	Material	Colour
Housing	ABS	black
Cable	UL1007/1569, AWG 24	red, black
Potting compound	Epoxy	black

Environmental Characteristics

Operating temperature	°C	- 20 to + 85
-----------------------	----	--------------

HS-324R-04-0300



# HS-324R-04-0300

Latching 2 - Wire  
Flatpack Hall Effect Sensor

## Characteristics

At recommended operation conditions if not otherwise specified in the column "Conditions".

Typical characteristics for  $T_J = 25\text{ °C}$  and  $V_{SUP} = 12\text{ V}$

Symbol	Parameter	wire colour	Min.	Typ.	Max.	Unit	Conditions
<b>Supply</b>							
$I_{SUPlo}$	Low supply current	red	5		7	mA	
$I_{SUPlo}$	High supply current	red	12		17	mA	
$I_{SUPHi}$	Reverse current	red			1	mA	for $V_{SUP} = -18\text{ V}$
<b>Output</b>							
$t_f$	Output fall time <sup>1)</sup>				1	$\mu\text{s}$	<sup>1)</sup> $V_{SUP} = 12\text{ V}$ ;
$t_r$	Output rise time				1	$\mu\text{s}$	
$t_d$	Delay time <sup>1)</sup>			16		$\mu\text{s}$	
$t_{samp}$	Output refresh period		1.6		2.66	$\mu\text{s}$	
$t_{en}$	Enable time of output after settling of $V_{SUP}$			50		$\mu\text{s}$	$V_{SUP} = 12\text{ V}$ $B > B_{on} + 2\text{ mT}$ or $B < B_{off} - 2\text{ mT}$

## Power-on-self-test

Self test can be triggered externally; details on request

<sup>1)</sup> Guaranteed by design

## Recommended Operating Conditions

Symbol	Parameter	wire colour	Min.	Max.	Unit	Conditions
$V_{SUP}$	Supply voltage	red	3.0	24	V	

## Magnetic Characteristics Overview


Symbol	Parameter	wire colour	Min.	Typ.	Max.	Unit	Conditions
$B_{ONth}$	ON threshold range <sup>1)</sup>	-	-30		30	mT	
$B_{OOth}$	OFF threshold range <sup>1)</sup>	-	-30		30	mT	
$B_{th}$	Adjustable step size <sup>2)</sup>	-		0.5		mT	
$T_C$	Temperatur compensation of magnetic thresholds <sup>3)</sup>	-	0		-3000	ppm/K	

<sup>1)</sup> Available range

<sup>2)</sup> Small steps at small values, bigger steps at higher values. May not be undercut

<sup>3)</sup> Different temperature compensation available on request

HS-324R-04-0300



**HS-324R-04-0300**

Latching 2 - Wire  
Flatpack Hall Effect Sensor

Magnetic Characteristics

Switching Type	Temp. coeff. of magnetic thresh. TC [ppm/K]	On point $B_{ON}$			Off point $B_{OFF}$			Hysteresis $B_{HYS}$ <sup>1)</sup>		
		[mT]			[mT]			[mT]		
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
latching	0	tbd.	12.0	tbd.	tbd.	- 12.0	tbd.	-	24.0	-
		A	B	C	D	E	F			

<sup>1)</sup> The hysteresis is the difference between the switching points  $B_{HYS} = B_{ON} - B_{OFF}$

Magnetic Approach (for example)

**latching type**

**frontal**

**slide by**

**turning**

\* Sensor center point

**Current consumption**

**Current consumption**